

Extension card 80 G2

Extension card

The extension card is increasing S-Node G2 outputs capacity by additional eight outputs. Outputs can be used either for monitoring door environment or as general I/O.

Art nr: 44281170 Extension card 80 G2

Performance


The whole construction is designed in order to be able perform effective and correct installation with a minimum of exterior connection materials. Extension card can be easily installed to the S-Node G2 without need to disassemble already installed unit.

Status for outputs is indicated by LED's that are automatically switched off when box is closed to decrease power consumption.

The relay outputs has a configurable output functionality with either NC, NO or voltage out.

The extension card also includes a separate connector row for splitting 24V, one input to five outputs. This requires a separate 24V power supply cable from the S-Node G2.

Note, connection terminals for additional connections are not included in the delivery, they must be ordered separately.

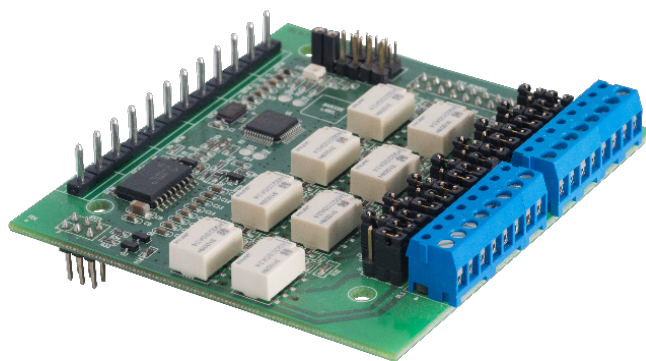

- › Extension card to increase output capacity of door control unit S-Node G2
- › Fitted and designed for easy installation and mounting with a minimum of external connecting materials
- › Product is certified for intruder alarm systems under SSF 1014 issue 5, EN 50131-3:2009, Security grade 3, Environmental class II

Extension card 80 G2

Extension card

Technical data

Power supply Typical/Min/Max	24VDC/20VDC/30VDC
Power consumption Typical/Max at 24VDC	44 mA/ 85 mA
Enclosure	N/A
Operating temperature	-10°C to +55°C
Dimensions (W/L/H)	82/82/20 mm
Weight NET	63 g

Specific technical data

Outputs 8 pcs relays (NO/NC/24V), 1A

Article Number

44281170 Extension Card 80 G2